



ELBA – The Perfect Combination

The ELBA pump series is made up by combining a gearbox and a centrifugal pump.

The ELBA group is utilized for farm lands irrigation, sewage spreading and umbilical systems.

STANDARD FEATURES

- Mechanical seal



VERSIONS

CCW as standard



ELBA 3500 1:4
Splined shaft
1"3/8 - Z6 ISO 500

CCW as standard



ELBA 6500 1:4
Splined shaft
1"3/8 - Z6 ISO 500

CCW as standard



ELBA 3500 1:3
Splined shaft
1"3/8 - Z6 ISO 500

CCW as standard



ELBA 6500 1:3
Splined shaft
1"3/8 - Z6 ISO 500

TECHNICAL DATA

	centrifugal pump max flow rate			Max rpm		Head m	Power at max vacuum kW (HP)	Weight kg
	m ³ /h	l/min	cfm	1:3	1:4			
ELBA 3500	210	3500	123	750	540	38	24 (32,2)	59
ELBA 6500	390	6500	229	750	540	70	60 (80,4)	90

OPTIONALS



Cutting device
ELBA 6500



Heavy duty
bearings




Preshaped Ring
ELBA 3500



Ø 140 mm scroll
ELBA 6500



CHARTS

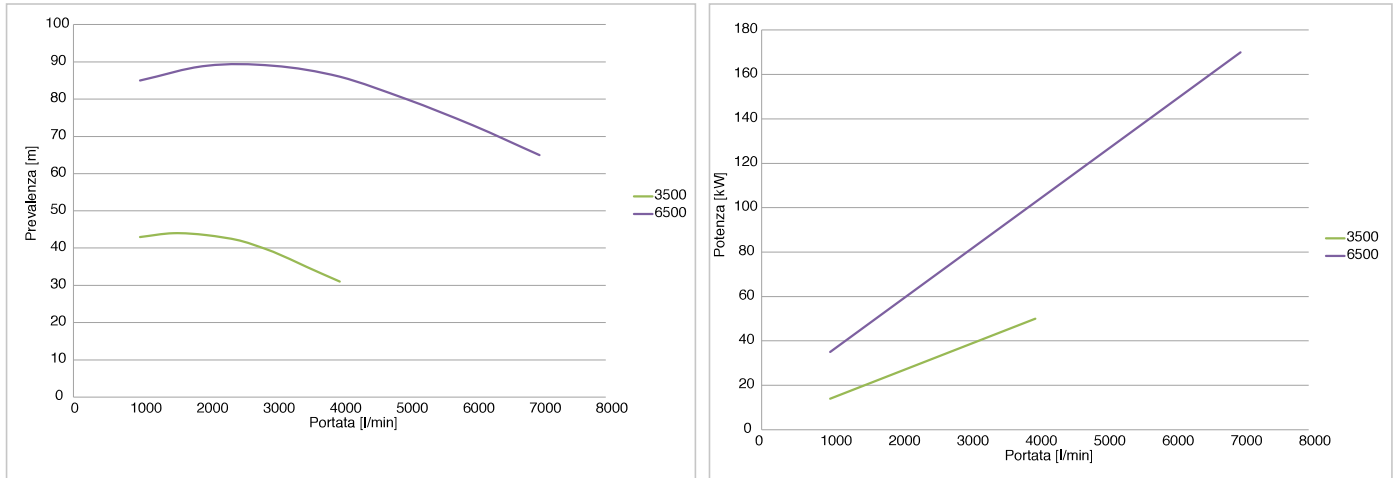

ACCESSORIES




Combined Group -
Centrifugal Pump

Top filling tank and Elba pump



Rubber coupling joint
pag. 104
Code 5060010004 - Ø150
Code 5060010002 - Ø200



Coupling Flange
pag. 88
Code 5010401009
GARDA 3500
Code 5010401008
GARDA 6500