





OVERSENTERVENTIL, dbl., NG06, 220 bar, just."H"

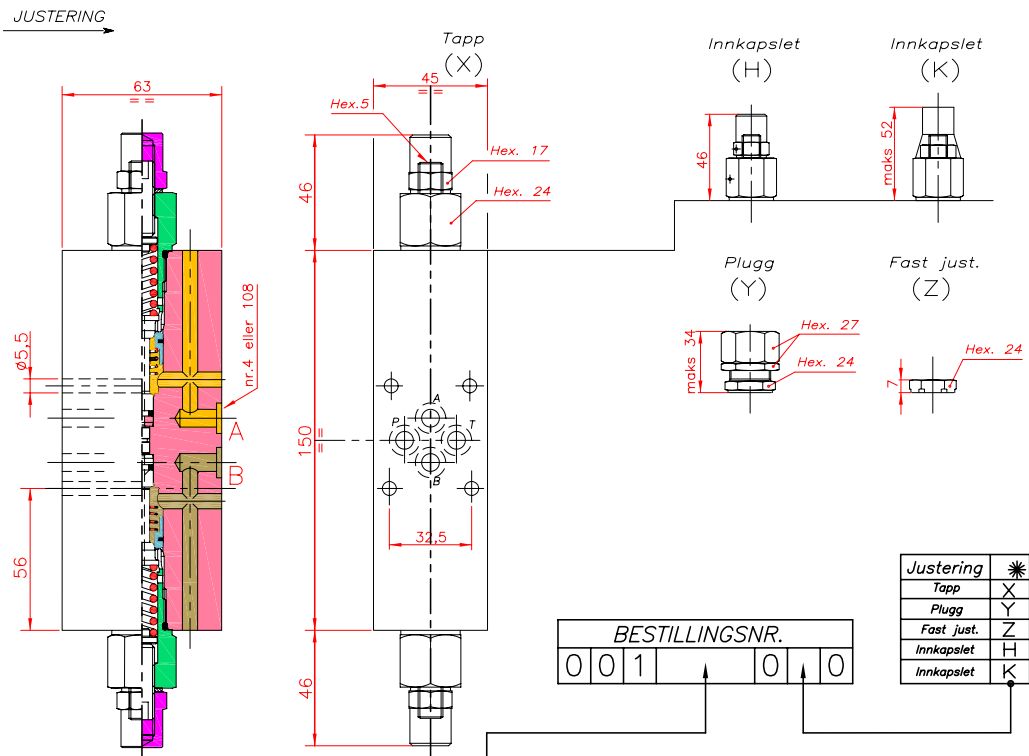

VENTILTYPE	Std. bar innst. (ved Q=5 l/min) 220 bar	Trykk økning bar/omdr. (56)	Std. bar innst. (ved Q=5 l/min) 350 bar	Trykk økning bar/omdr. (138)	Pilot forhold	Flenstype	Maks. Q-verdi l/min
OWC-DE-L6-*	227		226		4,25:1	CETOP 03	50
	Innst.område 30 - 220 bar (Farge: grønt)		Innst.område 60 - 350 bar (Farge: gult)				

LUEN

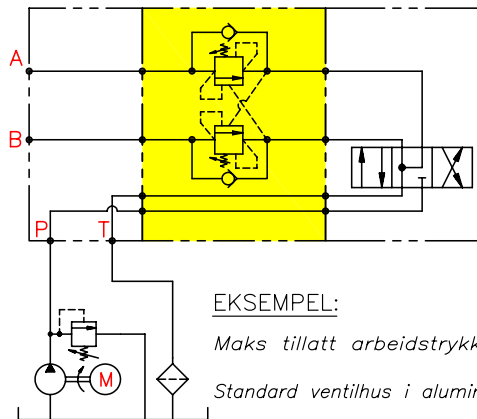

EKSEMPEL:

Maks tillatt arbeidstrykk : $\frac{350 \text{ bar}}{1.3} \sim 270 \text{ bar}$

Standard ventilhus i aluminium, stål pr. forespørsel

Min/maks nominell dia.	DN	6 / 7
Min/maks Q-verdi	l/min	1/50
Maks arbeidstrykk		350 bar
Maks innst. trykk		350 bar
Pilot forhold		4.25 : 1
Min/maks romtemperatur	°C	-30 +50
Min/maks oljetemperatur	°C	-30 +80
Filtrering	micron	30
Min/maks spennmoment	Nm	110 ÷ 115

