




OVERSENTERVENTIL, enkel, 1/2", 210 og 350 bar

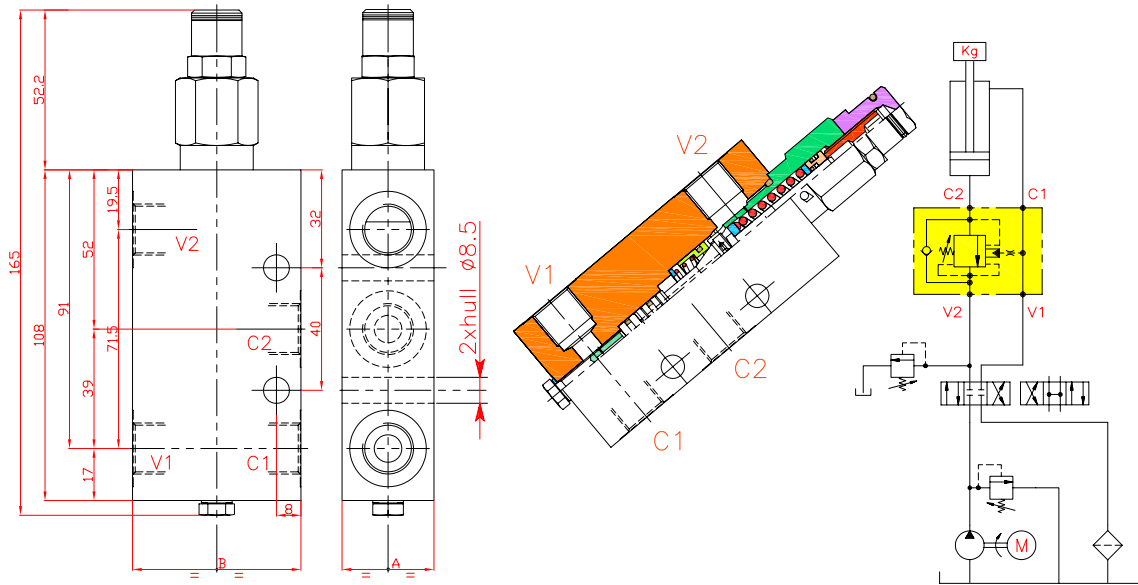


VENTILTYPE	Innst.område 100 ÷ 350 bar	Innst.område 60 ÷ 210 bar	A	B	Port dim. V2-C2-V1-C1 BSPP	Nom. dia. DN	Maks Q-verdi l/min
A-WB/CC/SE-14/L	548	549	30	55	1/4"	6	20
A-WB/CC/SE-38/L	447	446	30	55	3/8"	8	40
A-WB/CC/SE-12/L	456	455	35	65	1/2"	10	60

Min/maks nominell dia.	DN	6 / 10
Maks Q-verdi	l/min	60
Maks arbeidstrykk		450 bar
Maks innst. trykk		350 bar
Pilot forhold		4.25 : 1
Min/maks romtemperatur	°C	-30 +50
Min/maks oljetemperatur	°C	-30 +80
Filtrering	micron	30


Stå. bar innst. (ved Q=5 l/min)	Innst.område min - maks bar	Farge
350	100 ÷ 350	Gult
200	60 ÷ 210	Grønt

BESTILLINGSNR.		
001		000

A-WB-CC-SE-38-L
A-WB-CC-SE-12-L

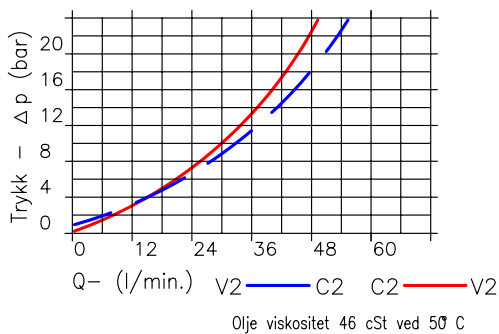

A-WB-CC-SE-14-L

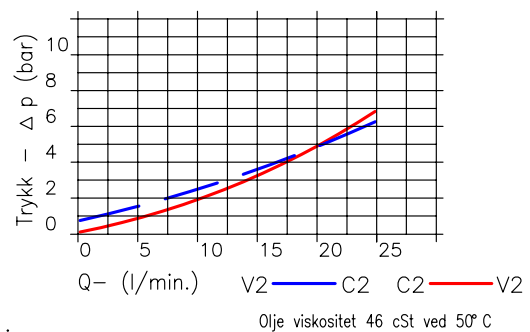

EKSEMPEL:

Maks tillatt arbeidstrykk : $\frac{450 \text{ bar}}{1.3} \sim 350 \text{ bar}$
Standard ventilhus i stål, aluminiumhus pr. bestilling.

