



TYPICAL RELIEVING PRESSURE (2 to 1 at Various of Control Current)


Type O (5–50 bar)

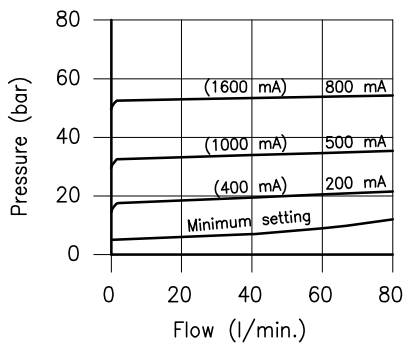



Type U (7–105 bar)

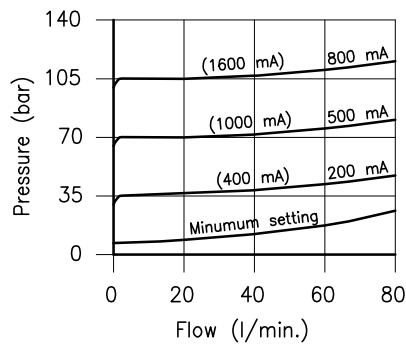

Type D (10–210 bar)

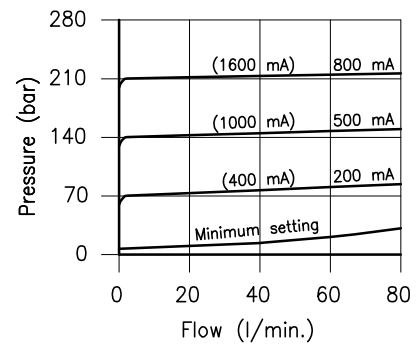


Type T (14–315 bar)

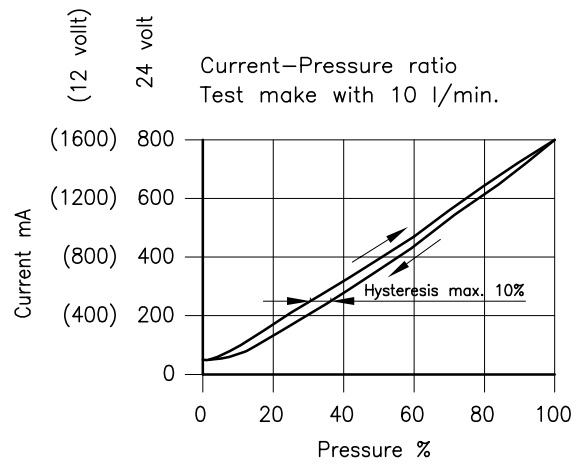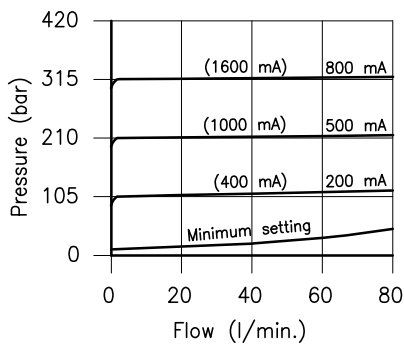

Ordering informations

PPI 30/D-24C-22H-W

PPI 30 = Valve type



Setting range

O = 5 - 50 bar

U = 7 - 105 bar

D = 10 - 210 bar

T = 14 - 315 bar

Voltage and power

12C-22H = 12 Volt DC

24C-22H = 24 Volt DC

W = Optional without Emergency

Codes:

PPI 30/O-12C-22H 35 011 224

PPI 30/U-12C-22H 35 011 176

PPI 30/D-12C-22H 35 011 177

PPI 30/T-12C-22H 35 011 178

PPI 30/O-24C-22H 35 011 222

PPI 30/U-24C-22H 35 011 162

PPI 30/D-24C-22H 35 011 163

PPI 30/T-24C-22H 35 011 164

External seals kit 90 620 103

Code only coil:

Coil P50-24C-22H 55 125 114

Coil P50-12C-22H 55 125 113

PPI 30 valves can be assembled on standard bodies 30-LO series; for dimensions see catalogue 16.010