


High pressure carry-over

High pressure carry-over plug SG25

The type SG25 series nipple is used for series mounting of valve blocks when pipe or hose is used between the blocks.


For RM 270 light Super Rapid see page 10.

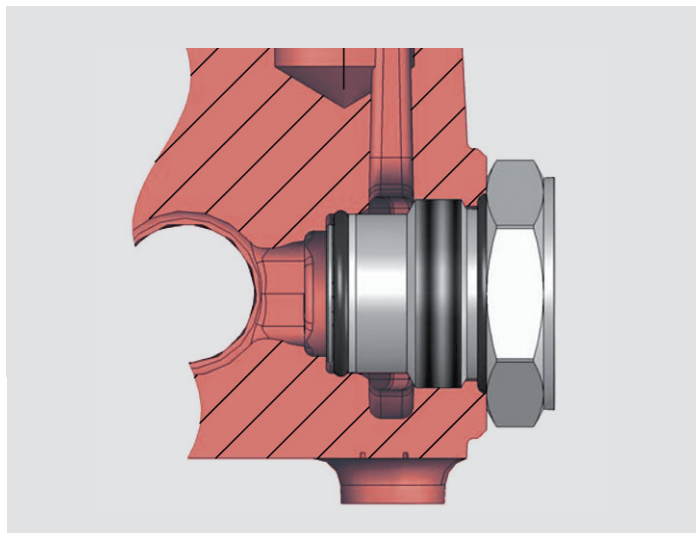


High pressure carry-over flange kit SC250

The type SC250 flange kit is used to connect valve blocks in series, without any pipe or hose.

For RM 270 light Super Rapid see page 10.

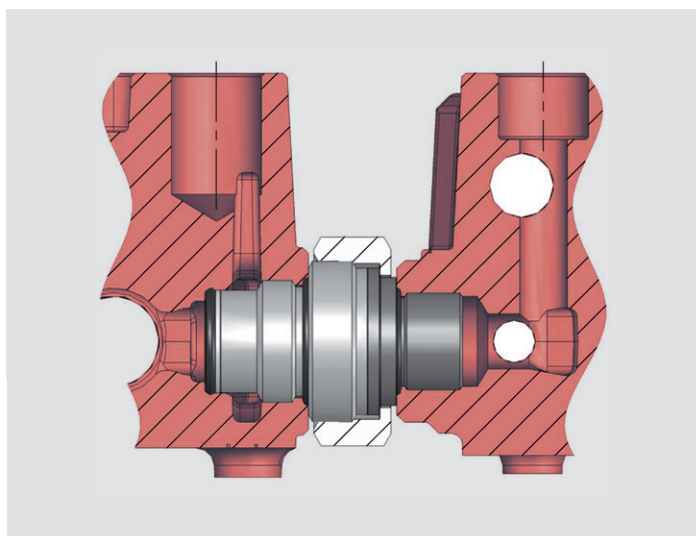

High pressure carry-over

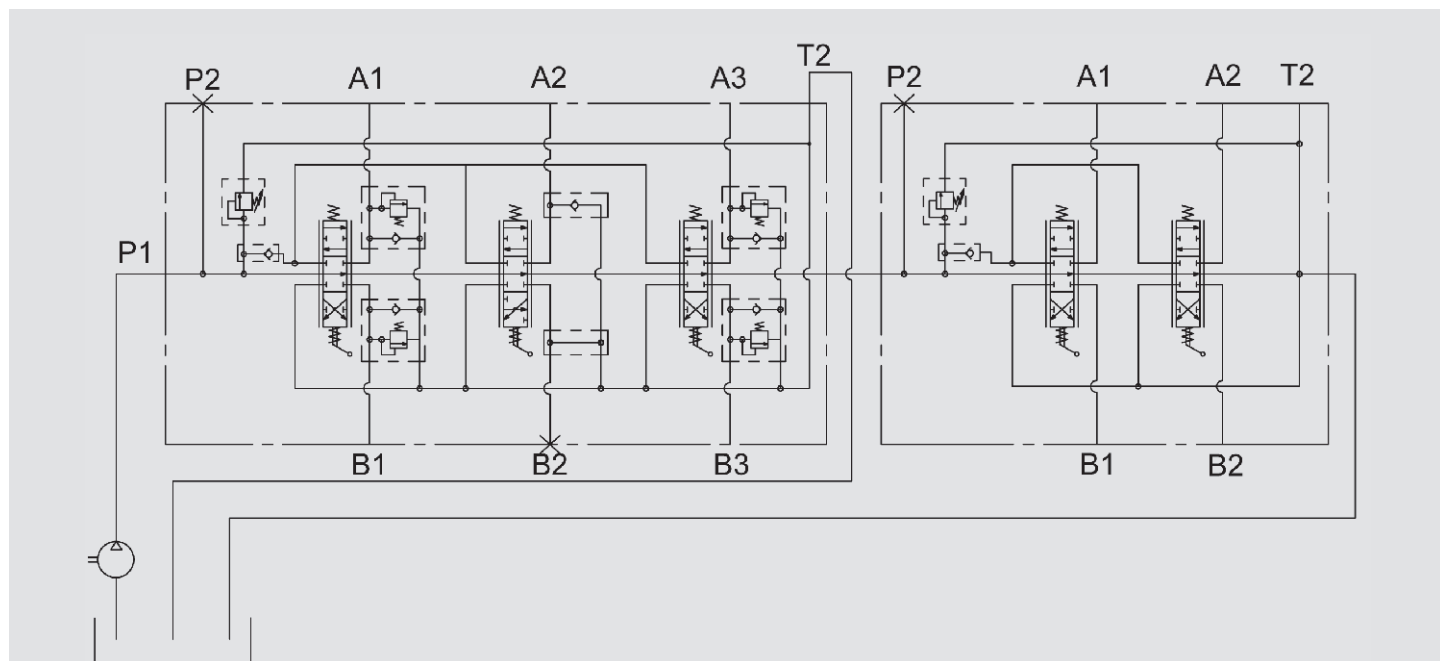

When high pressure carry over SG25 or SC250 is used for series mounting, the tank connection T2 for the first valve must always be connected to the tank (see diagram above). Valve blocks connected in series give priority of flow to the first block in the series. This means that there will be no flow at block 2 if block 1 is fully activated.

Preliminary Version