



**SCPD 56/26 DIN is a dual flow pump with two separate flows of different sizes.**

SCPD 56/26 DIN gives 56.0 and 26.0 cm<sup>3</sup>/rev. and supports a maximum working pressure of 400 bar. It can effectively be directly mounted on gear boxes equipped with engageable and disengageable power take-offs. It is speed optimised and therefore supplied for either left (L) or right (R) rotation direction.

**Other advantages:**

- High self-priming speed
- Constant low noise level
- Long life due to high demands on material selection, such as bearings, seals, etc.
- O-rings on all contact surfaces as well as double shaft seals

## Versions, main data

Example

<b>SC</b>	<b>PD</b>	-	<b>56/26</b>	<b>L</b>	-	<b>V</b>	-	<b>DL4</b>	-	<b>L35</b>	-	<b>S0</b>	<b>S</b>	-	<b>2</b>	<b>00</b>
Line	1		2	3		4		5		6		7	8		9	10

Line	
SC	Sunfab Compact, bent-axis design

7.	
S0	Sunfab standard

1. Type	
PD	Dual flow pump

8. Connections	
S	Sunfab standard

2. Displacement	
	56/26

9. Additional	
2	Optimised

3. Direction of rotation	
L	Left
R	Right

10. Accessories	
00	No accessories available

4. Sealing	
V	FPM

5. Mounting flange	
DL4	DIN 4-h (ISO 76530)

6. Shaft	
L35	DIN 5462/ISO14


X = Standard, preferred

(X) = Available, option

O = Contact Sunfab

**Pump SCPD 56/26 DIN**

Theoretical oil flow A+B at pump speed	rpm	l/min		
	600	33.5 + 15.5 = 49		
	1000	56.0 + 26.0 = 82		
	1200	67.0 + 31.0 = 98		
	1500	84.0 + 39.0 = 123		
	1800	100.5 + 46.5 = 147		
Displacement A+B	cm <sup>3</sup> /rev	56.0 + 26.0		
Max pump speed	rpm	1850		
Max working pressure	Bar	400		
Weight	kg	18		
Tare-weight torque without valve	Nm	21		
Theoretical power at pressure and pump speed	rpm	200 Bar	300 Bar	400 Bar
	600	11.2 + 5.2 = 16.4 kW	16.8 + 7.8 = 24.6 kW	22.4 + 10.4 = 32.8 kW
	1200	22.4 + 10.4 = 32.8 kW	33.6 + 15.6 = 49.2 kW	44.8 + 20.8 = 65.6 kW
	1800	33.6 + 15.6 = 49.2 kW	50.4 + 23.4 = 73.8 kW	67.2 + 31.2 = 98.4 kW
Theoretical torque on pump shaft at different pressures		200 Bar	300 Bar	400 Bar
		178 + 83 = 261 Nm	267 + 124 = 391 Nm	356 + 165 = 521 Nm
Direction of rotation	Left (L) or Right (R)			

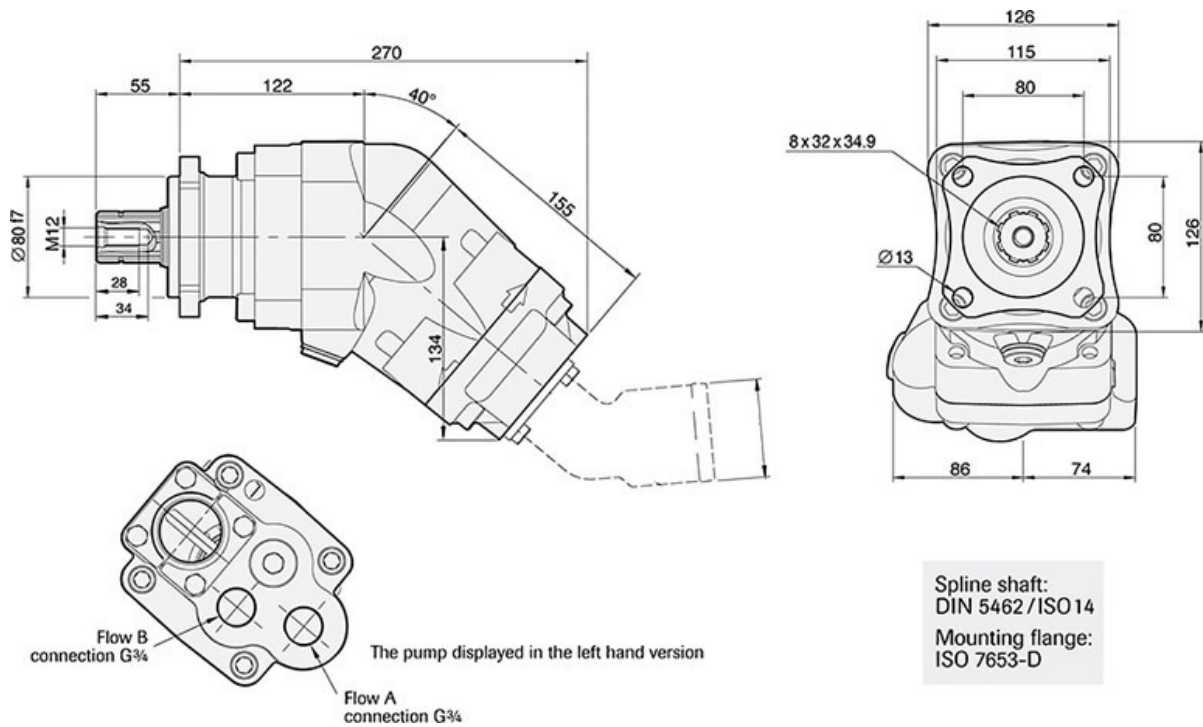



**WARNING!**

When the pump is running:

1. Do not touch the pressure hose
2. Watch out for rotating parts
3. The pump and hoses may be hot

Sunfab reserves the right to make changes in design and dimensions without notice. Printing and typesetting errors reserved.

© Copyright 2019 Sunfab Hydraulics AB. All Rights Reserved.